

sat-nms PowerSensor PSMC or PSMKu

The **sat-nms** PowerSensor manufactured by SatService GmbH is a measurement tool which measures the RF output power of Ku-band or C-band satellite communications signals and provides this information both, on a web page via an internal web server or as M&C output information for control systems.




The **sat-nms** PowerSensor enables the **sat-nms** software to perform a precise power measurement, even if the monitored and controlled Satcom equipment, like TWT or SSPA amplifiers or converters, do not provide the necessary capabilities or do not have the required accuracy.

Applications which include a transmit power control loop need to measure the transmit amplifier output power. While many amplifiers provide a built-in power sensor with adequate accuracy and resolution, some low-cost models do not. This power sensor is intended to be a supplement to such amplifiers or transceivers.

Key Features

- Small mechanical dimensions
- Direct TCP/IP interface at the power sensor
- TCP/IP based design
- Ethernet interface
- HTTP web browser interface
- Unlimited number of clients possible
- Relay contact output for level alarm
- Each PowerSensor is electronically calibrated for level and temperature linearity and therefore provides excellent level accuracy
- Easy interface with other vendors M&C systems via HTTP get requests on TCP/IP

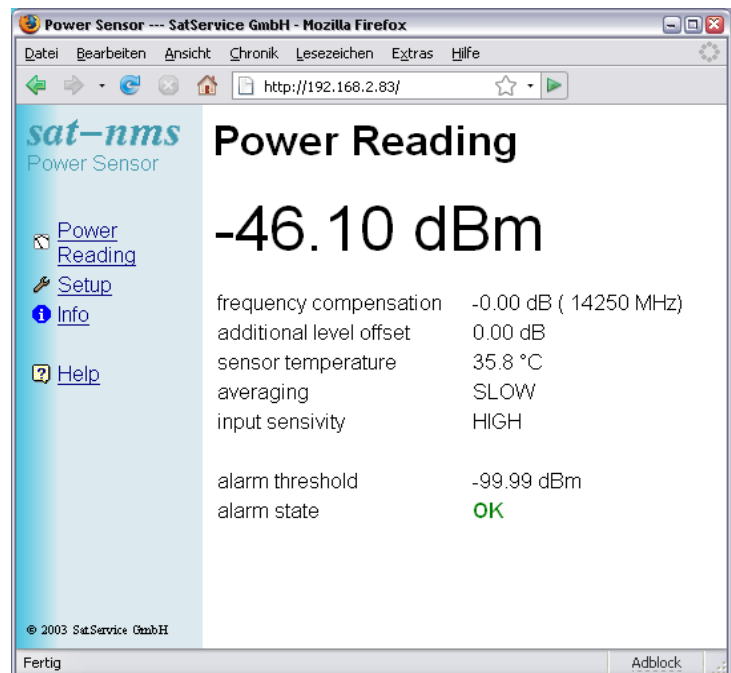

frequency compensation	-0.00 dB (14250 MHz)
additional level offset	0.00 dB
sensor temperature	35.8 °C
averaging	SLOW
input sensitivity	HIGH
alarm threshold	-99.99 dBm
alarm state	OK

Applications

- Power measurements
- Pilot measurement
- The PSM can operate as a stand-alone solution or fits into the overall **sat-nms** Network Management System solution provided by SatService.

Contact Information

SatService
Gesellschaft für Kommunikationssysteme mbH

Hardstrasse 9, D-78256 Steisslingen, Germany

phone +49 7738 97003, fax +49 7738 97005
e-mail info@satservicegmbh.de

www.satnms.com

www.satservicegmbh.de

Technical Specification

RF Specification


Input frequency range (to be defined at order)	5,8 to 6,6GHz (PSMC) 13,75 to 14,5GHz (PSMKu)
Input Connector	N male 50Ohm
Input Return Loss	> 16dB
Input Power Measurement Range	-15 to +15dBm
Resolution of power level	0,01dB
Linearity failure	+/-0,1 dB
Absolute accuracy	1 dB
Averaging function selectable	High, Low, Auto

M&C Interface Specification

Ethernet interface for M&C and user interface	10-Base-T
User interface	Via any Web Browser
M&C interface for remote monitoring & control	Via http GET requests
Summary fault indication	Relay contact
Level alarm indication	Relay contact

Electrical and Mechanical Specification, Environmental conditions

Supply voltage	22V to 28V unregulated DC / 200mA
Connector for 24V supply and alarm contact	Binder Series 712 7PIN
Temperature range	5° to 50° C
Humidity	up to 90% non condensing
Compact Module	185x60x35mm

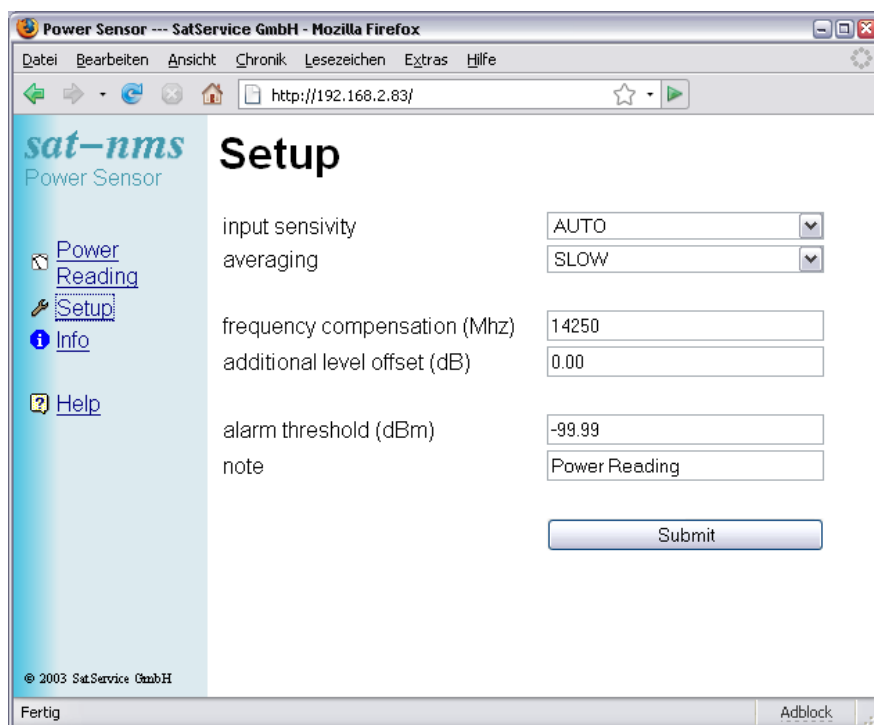

Remote Control

The **sat-nms** PowerSensor can be controlled remotely by a monitoring and control application through the TCP/IP interface. All communication with the PowerSensor is made with HTTP requests.

The PowerSensor implements the 'Hypertext Transfer Protocol' (HTTP, RFC-1945) both, for the user interface and for the M&C interface. All communication, even setting operational parameters, is done with HTTP GET requests. For the user interface, the PowerSensor replies to requests with HTML pages which display the requested information in a web browser. For the M&C interface, the PowerSensor replies to requests with one text line which contains the information.

Sample of a command to read status
Example of a parseable string

http://10.0.0.1/read?fmt=txt
dbms=-12.34&adcv=12345&temp=22.5&sens=LOW&tflt=OK